


BLACKBUTT

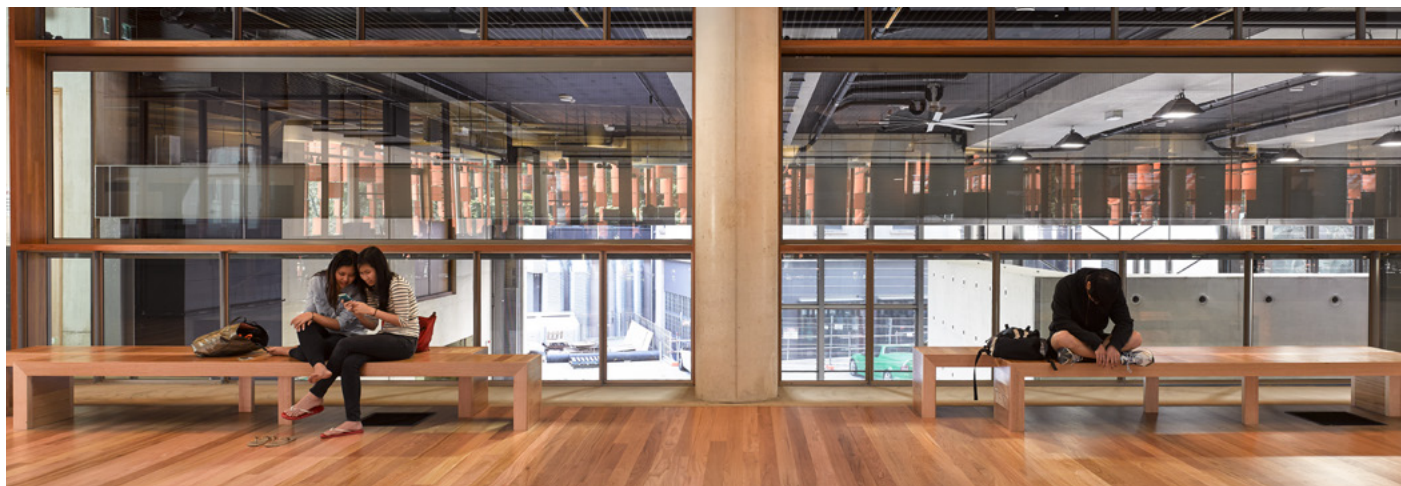

BLACKBUTT

BLACKBUTT IS THE IDEAL TIMBER FOR A WIDE VARIETY OF CLADDING, FLOORING AND DECKING APPLICATIONS.

A popular choice for architects, builders and designers, Blackbutt is admired for its incredible durability and fire resistant properties. Perfect for large fit outs (e.g. shopping centres and high rise buildings) Blackbutt is a readily available and versatile timber.

A beautiful hardwood, Blackbutt presents a relatively straight and uniform grain with an appealing colour palette, ranging from cream to pale brown with a hint of pink.

With a reputation for excellence, Recycled Timber's Class One Durability Blackbutt is in high demand within the commercial building industry. Our recycled Blackbutt is graded according to the Interim Industry Standards whilst our new certified Blackbutt is AFS approved (Australian Forestry Standard).



COMMON NAME Blackbutt

LOOK & FEATURES A particularly strong and durable timber that can display gum and veins giving it a unique look.

BOTANICAL NAME Eucalyptus pilularis

COLOUR A subtle colour range where light and neutral is required from golden yellow through to pale browns. May have a slightly pinkish tinge.

COMMON USES An extremely versatile timber with uses ranging from posts and beams through to decking, flooring and furniture.

PROPERTIES

DENSITY (KG/M3)	
GD	1150
ADD	900
HARDNESS KN (JANKA)	
Green	6.4
Dry	8.9
DURABILITY CLASS	1
STRENGTH GROUP	S2/SD2
JOINT GROUP	J2/JD2
SHRINKAGE	
Radial % (approx.)	4
Tangential % (approx)	7
STRUCTURAL GRADES	
Unseasoned	F14/F17/F22
Seasoned	F22/F27
TOUGHNESS (NM)	
Green	Medium
Dry	Medium
EARLY FIRE HAZARD INDICES	
Ignitability	13
Spread of Flame	7
Smoke Development	3
TERMITE RESISTANT	(toAS3660) Yes
LYCTID SUSCEPTIBLE SAPWOOD	No



p 02 4774 2888
e sales@recycledtimbers.com.au
Unit 2, 78 Dunheved Circuit,
St Marys NSW 2760
www.recycledtimbers.com.au